

13F-6X Series

RJ45 10/100 BASE-T JACK WITH MAGNETIC MODULE

FEATURES

- Magnetic designs to support every PHY
- Meet or exceed IEEE 802.3 and ANSI X3.263 standards including 350uH min OCL with 8mA bias
- Minimum 1500Vrms isolation per IEEE 802.3 requirement
- Designed for 100 base transmission over UTP-5 cable
- Size same as RJ-45 modular jack to save PCB board Space
- Recognized by UL 60950-1




ELECTRICAL SPECIFICATIONS @25°C -Operating temperature 0°C TO 70°C


Part Number	Turns Ratio $\pm 5\%$		EMI Fingers	LED (L/R)	Insertion Loss (dB max)	Return Loss (dB min @100 $\Omega \pm 15\Omega$)				Crosstalk (dB min)			Common Mode Rejection (dB min)			Hipot (V_{rms})
	TX	RX				0.3-100 MHz	1-30 MHz	40 MHz	50 MHz	60-80 MHz	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz
13F-60CND2NL	1CT:1CT	1CT:1CT	YES	N/A	-1	-18	-16	-12	-10	-40	-35	-30	-30	-20	-20	1500
13F-64GYD2NL	1CT:1CT	1CT:1CT	YES	G/Y	-1	-18	-16	-12	-10	-40	-35	-30	-30	-20	-20	1500
13F-604NDZ2NL	1CT:1CT	1CT:1CT	YES	N/A	-1	-18	-16	-12	-10	-40	-35	-30	-30	-20	-20	1500

Mechanicals and Dimensions


13F-604NDZ2NL




13F-64GYD2NL

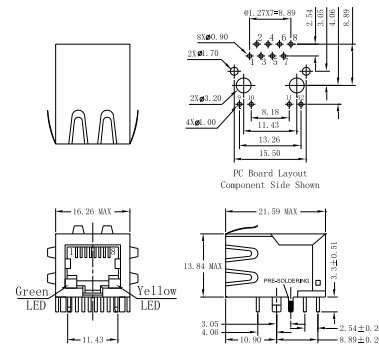


13F-60X




13F-61X




13F-62X




13F-63X




13F-64X




13F-65X



13F-66X



13F-67X



DABURN

DABURN ELECTRONICS & CABLE

44 Richboynton Road, Dover, New Jersey 07801 U.S.A.

Tel: (973)328-3200 Fax: (973)328-3130 - Email: daburn@daburn.com - Website: www.daburn.com

Ver. 2015-1-13